# Tail Pipe Installation With Roof Vent

#### Step 1:

Turn the vent upside down and make a cardboard template from the flange. The template should be the same size as the flange with the hole in the middle.



#### Step 3:

Remove cardboard template to show the square and circle pattern.



# Step 2:

Using the template, trace the square and circle onto the roof as shown.



#### Step 4:

Using a reciprocating saw cut out a hole in the roof deck and remove all debris.





# Active Ventilation Products, Inc.

311 First Street, Newburgh, NY 12550-4857
800-ROOF VENT (766-3836) Ph: 845-565-7770 Fax: 845-562-8963
Website: roofvents.com Email: sales@roofvents.com

5778-10

Tail Pipe Installation With Roof Vent

## Step 5:

Once the hole is cut reach in the attic and pull up the Duct through the hole.



# Step 6:

Insert the bottom of the Tail Pipe to the Flex Duct.



#### Step 7:

Using a Zip Tie secure the Flex Duct to the Tail Pipe.



Put roofing sealant on the underside along the bottom edge of flange as shown.







# Active Ventilation Products, Inc.

 311 First Street, Newburgh, NY 12550-4857

 800-ROOF VENT (766-3836)
 Ph: 845-565-7770
 Fax: 845-562-8963

 Website: roofvents.com
 Email: sales@roofvents.com

# Tail Pipe Installation With Roof Vent


## Step 9:

Push the Flex Duct back into the attic, then lift shingles to insert flange underneath.



#### 10A:

Required screw: #10 x 1.5" steel sheet metal screw. Total number of screws required = 12

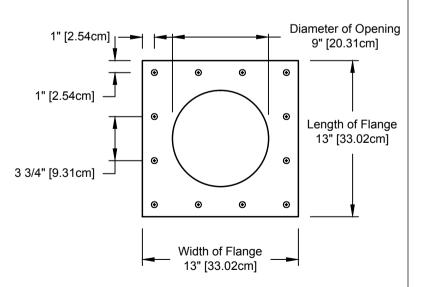

# Step 10:


With the vent in place secure the flange to the shingle roof using a screw gun or drill.



#### Step 11:

This is how the Round Back Vent should look when finished.





# Active Ventilation Products, Inc.

311 First Street, Newburgh, NY 12550-4857
800-ROOF VENT (766-3836) Ph: 845-565-7770 Fax: 845-562-8963
Website: roofvents.com Email: sales@roofvents.com

5778-10