For Shingle Roof Installation to Vent an Attic

Step 1:

Turn the vent upside down and make a cardboard template from the flange. The template should be the same size as the flange with the hole in the middle.



Step 3: Remove cardboard

template to show the square and circle pattern.

Step 4: Using a reciprocating

saw cut out a hole in the roof deck and remove all debris.



Step 2:

Using the template, trace the square and circle onto the roof as shown.



Step 5:

Put roofing sealant on the underside along the bottom edge of flange as shown.





Active Ventilation Products, Inc.

311 First Street, Newburgh, NY 12550-4857
800-ROOF VENT (766-3836) Ph: 845-565-7770 Fax: 845-562-8963
Website: roofvents.com Email: sales@roofvents.com

5777-11

For Shingle Roof Installation to Vent an Attic


Step 6:

Slide vent underneath the shingles stay within the square outline.



7B:

Required screw: #10 x 1.5" steel sheet metal screw Total number of screws required = 12

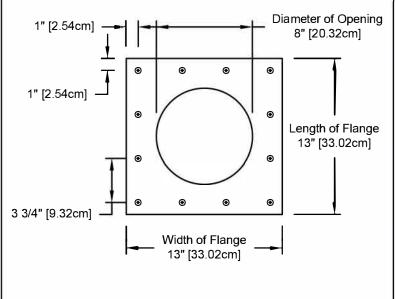

Step 7A:

With the vent in place secure the flange to the shingle roof using a screw gun or drill



Step 8:

This is how the Round Back Vent should look when finished





Active Ventilation Products, Inc.

311 First Street, Newburgh, NY 12550-4857
800-ROOF VENT (766-3836) Ph: 845-565-7770 Fax: 845-562-8963
Website: roofvents.com Email: sales@roofvents.com

5777-11